


# AIR HOSE COUPLERS

## AIR HOSE COUPLERS

(Coupler/Plug drawings are not actual size)

- Precision engineered for maximum performance.....*longer life!*
- Tougher wear resistant, anti-corrosion materials throughout.
- They swivel to prevent air line kinks! • Fully automatic. • Permits 45 cfm air flow at 100 p.s.i.g.
- Operating pressure up to 250 p.s.i.g. • Operating temperature range: -40½ F. To +250½ F.



### 3550

Coupler  
1/4" Female NPT  
Mates with #3555 & #3560  
B = 1-1/16"  
C = 1-31/32"  
Box Qty. 1



### 3555

Male Nipple  
1/4" NPT  
Mates with #3550  
B = 9/16"  
C = 1-11/16"  
Box Qty. 1



### 3560

Female Nipple  
1/4" NPT  
Mates with 3550  
B = 5/8"  
C = 1-3/4"  
Box Qty. 1



### 3535

Coupler  
1/4" Female NPT  
Mates with #3540 & #3545  
B = 1-1/16"  
C = 1-11/16"  
Box Qty. 1



### 3540

Male Nipple  
1/4" NPT  
Mates with #3535  
B = 9/16"  
C = 1-25/32"  
Box Qty. 1



### 3545

Female Nipple  
1/4" NPT  
Mates with #3535  
B = 5/8"  
C = 1-9/16"  
Box Qty. 1



### 3565

Coupler  
1/4" Female NPT  
Mates with #3570 & #3572  
B = 1-1/16"  
C = 2-13/32"  
Box Qty. 1



### 3570

Male Nipple  
1/4" NPT  
Mates with #3565  
B = 9/16"  
C = 2-5/32"  
Box Qty. 1



### 3572

Female Nipple  
1/4" NPT  
Mates with #3565  
B = 5/8"  
C = 2-1/16"  
Box Qty. 1



## HVLP EURO Coupler & Plugs

To achieve optimum atomization, an HVLP Spray Gun requires sufficient air transfer through the gun to produce the necessary air pressure at the air cap and attain the proper CFM (cubic feet per minute). This is accomplished by using the new quick converting HVLP EURO Coupler that provides a larger inside diameter enabling more CFM to pass through the connection. The design of this system also enables complete insertion of the plug into the coupler before air is activated thus eliminating air pressure resistance during the plug connection.

### 3591

1/4" Quick  
Converting  
Coupler  
Female, NPT  
1 Per Pkg.

### 3592

1/4" Plug  
Female, NPT  
1 Per Pkg.

### 3593

1/4" Plug  
Male, NPT  
1 Per Pkg.



Also available:

### 3590

Coupler Set  
Contains:  
1 - #3592  
1 - #3591

# AIR HOSE / MISCELLANEOUS




**3573**  
 Brass  
 Hose Splicer  
 For 3/8" I.D. Air Hose  
 Barbed Type  
 Box Qty. 10

**3574**  
 Brass  
 Hose Splicer  
 For 1/4" I.D. Air Hose  
 Barbed Type  
 Box Qty. 10



**3580**  
 Safety blow gun.  
 Meets all federal standards relating to OSHA.  
 Maximum inlet pressure 150 P.S.I.  
 Inlet size 1/4" NPT.  
 Box Qty. 1

## "BIG RED AIR HOSE"

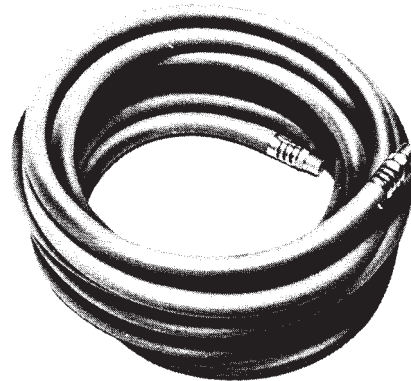

**"BIG RED"** is an extremely flexible, durable hose for use with air, water or mild chemicals. It is resistant to oil and gasoline and with it's high flexibility you have an ideal hose for lube and repair bays. Both the inner hose and cover are made of Prime PVC, and cord-reinforced for added strength. Big Red is far more resistant to oil and gasoline than rubber, and offers three times the life under normal conditions. It is more flexible and weighs only half as much as comparable rubber hose.

Working Pressure Maximum..... 300 PSI  
 Burst Pressure.....1200 PSI

Product No.	I.D.	Length	Fittings
<b>4102</b> .....	3/8"	x 25 Ft.	..... 1/4" NPT
<b>4099</b> .....	3/8"	x 35 Ft.	..... 1/4" NPT
<b>4103</b> .....	3/8"	x 50 Ft.	..... 1/4" NPT